

COMPACT FIRE RIBBON™

Index # 21, Rev-18 [14-Sept-2011], Page 1 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

MATERIAL OPTIONS:

Supplied as a suite with Burner, Enclosure, Fascia and optional gather.

Enclosure: Polished Steel.

Fascia Options: Choose any fascia from the CVO natural stone range. See website or ask for samples.

CE APPROVAL:

The Ribbon Burner is CE approved for the following gas categories and is available for the following Countries.

UK, EIRE, AUSTRIA, CZECH REPUBLIC, DENMARK, ESTONIA, FINLAND, GREECE, ITALY, LITHUANIA, LATVIA, NORWAY, PORTUGAL, ROMANIA, SLOVENIA, SLOVAKIA, SPAIN, SWEDEN, SWITZERLAND, TURKEY.

GERMANY, LUXEMBOURG, NETHERLANDS FRANCE, BELGIUM, CYPRUS, DENMARK, ESTONIA, FINLAND, HUNGARY, LITHUANIA, NORWAY,

Approved Gas Categories:

- **NATURAL GAS:**
 - NG-I2H-G20-20mBar / NG-I2E-G20-20mBar / NG-I2E⁺-G20/G25-20/25mBar / NG-I2L-G25-25mBar
- **LPG/PROPANE**
 - LPG-I3P(37)-G31-37mBar / LPG-I3+G30/G31 – 28-30/37 mBar / LPG-I3B/P – G30/G31 – 30mBar

DIMENSIONS:

Overall size of surround (fascia): - 605mm (H) x 980mm (W) x DEPTH (to Wall) 40mm

Note: the stone is 20mm thick; there is a 20mm wall bracket with lower air vent hidden by the stone. This Air vent must not be blocked or the fascia mounted flush with the wall.

Dimensions of fireplace opening (hole in fascia): 518mm (W) x 265mm (H)

Dimensions of standard enclosure : 540mm (W) x 470mm (H) x 310mm (D)

RIBBON POWER RATING:

Natural Gas: 6.0kw [15p/hour]

Flow Rate : 0.7m³/Hour

LPG/Propane: 6.5kw [50p/hour]

Flow Rate: 0.3m³/Hour

OTHER TECHNICAL INFORMATION:

- **Gas Types** : Fire available for Natural Gas or LPG/Propane. Specify when ordering.
- **Control System** : Battery Operated Remote Control with IR Magic Eye and Wall Switch. Full Sequence – ON/OFF & UP/DOWN.
- **Chimney System** : Class 2 or Minimum 2 meter x 127mm Flue Liner from above top of gather height. It is recommended to buy the standard gather with the fire to ensure correct installation and to stop debris falling into the enclosure.
- **Safety Devices** : ODS (Oxygen Depletion System) and FFD (Flame Failure Device).
- For air brick requirements please see air brick chart below in relation to high input settings.
- When installing this into an existing chimney with a flue liner the enclosure & gather must be sealed to the existing chimney to ensure that air cannot flow behind the enclosure. Failure to do this will result in serious damage to the burner unit and enclosure.
- Natural Limestone: The limestone supplied by CVO Fire is a natural product and every fascia is different in colour, shading and characteristics. Limestone is a soft material which contains fossils and CVO Fire can control the quantity or pattern. If in doubt about natural stone it is suggested to purchase a uniform stone like madre perle, travertine or cream rigel.
- For the builders opening please add 50mm to the overall sizes for adjustments.
- NOTE – The enclosure must be fitted with sticking 20mm out from the wall – this is to match to the fascia and to provide air ventilation to the burner. The slot is covered by the stone fascia.

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN

Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web:

www.cvo.co.uk


SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK.

Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.

COMPACT FIRE RIBBON™

Index # 21, Rev-18 [14-Sept-2011], Page 2 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

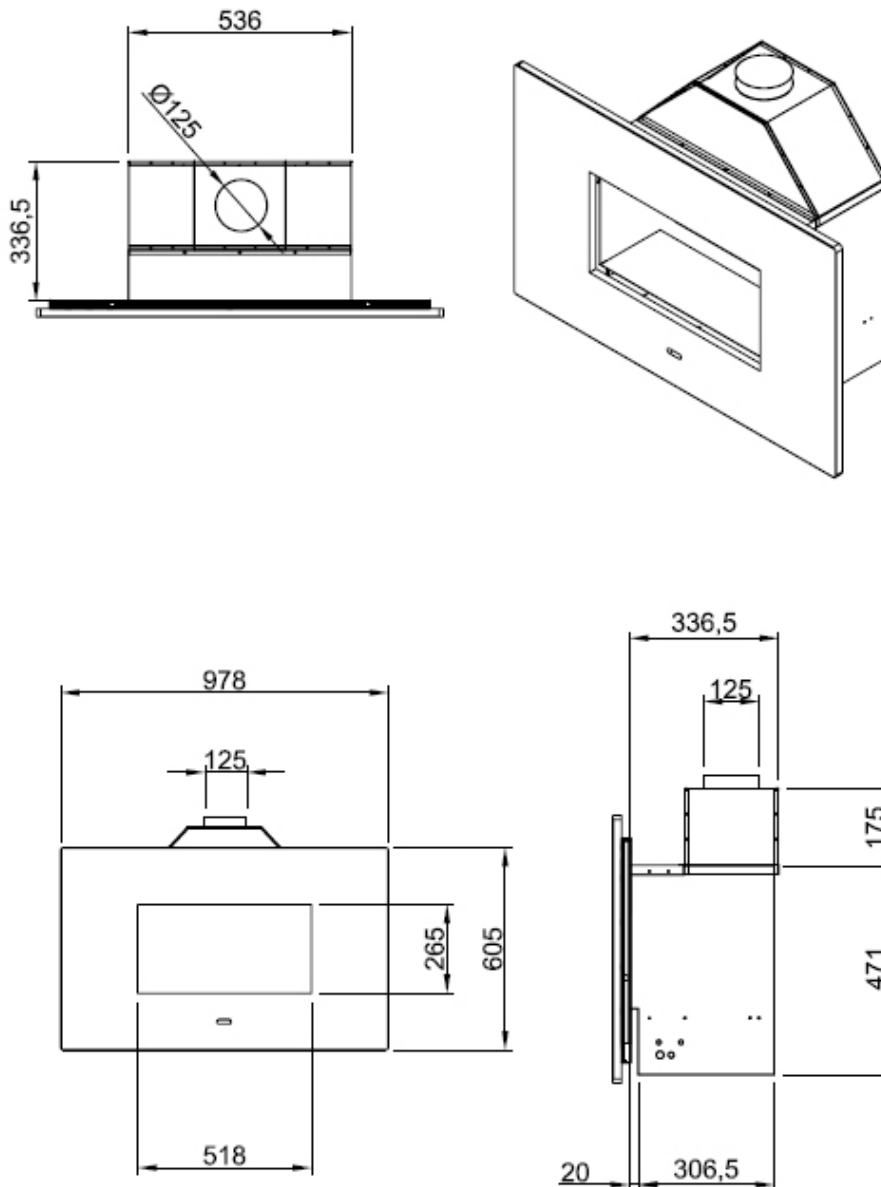

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.