

## SPECIFICATION SHEET

### COMPACT RIBBON - (FIRE RIBBON™)

Index # 21, Rev-13

Page 1 of 2

#### MATERIAL OPTIONS:

Supplied as a suite with Burner Enclosure and Fascia.

Burner: for NG or LPG

Enclosure: Polished Steel [NG or LPG], Limestone [NG Only] or Black Granite [NG Only].

Fascia Options: Cream Steel, Black steel, Brushed Stainless, Bronze, Limestone, Black Granite or White Madre Perle

#### CE APPROVAL:

NG-I2H-G20-20mBar

UK, EIRE, AUSTRIA, CZECH REPUBLIC, DENMARK, ESTONIA, FINLAND, GREECE, ITALY, LITHUANIA, LATVIA, NORWAY, PORTUGAL, ROMANIA, SLOVENIA, SLOVAKIA, SPAIN, SWEDEN, SWITZERLAND, TURKEY.

NG-I2E-G20-20mBar

GERMANY, LUXEMBOURG, POLAND, ROMANIA

NG-I2E<sup>+</sup>-G20/G25-20/25mBar

FRANCE, BELGIUM

NG-I2L-G25-25mBar

NETHERLANDS

LPG-I3P(37)-G31-37mBar

UK, EIRE, BELGIUM, SWITZERLAND, CZECH REPUBLIC, FRANCE, GREECE, ITALY, PORTUGAL, SLOVENIA, SLOVAKIA, SPAIN, TURKEY

LPG-I3+G30/G31 - 28-30/37 mBar

UK, EIRE, BELGIUM, SWITZERLAND, CYPRUS, CZECH REPUBLIC, FRANCE, GREECE, ITALY, PORTUGAL, SLOVENIA, SLOVAKIA, SPAIN

LPG-I3B/P - G30/G31 - 30mBar

UK, BELGIUM, CYPRUS, DENMARK, ESTONIA, FINLAND, FRANCE, GREECE, HUNGARY, LITHUANIA, NETHERLANDS, NORWAY, ROMANIA, SWEDEN, SLOVENIA, SLOVAKIA, SPAIN, TURKEY

#### DIMENSIONS:

Overall dimensions of fascia/surround:

HEIGHT: 605mm x WIDTH: 980mm x DEPTH: 40mm

BRONZE HEIGHT: 605mm x WIDTH: 980mm x DEPTH: 60mm

Dimensions of standard enclosure:

HEIGHT: 265mm x WIDTH: 518mm x DEPTH: 355mm

BRONZE HEIGHT: 265mm x WIDTH: 518mm x DEPTH: 355mm

Dimensions of required construction opening:

With Gather - HEIGHT: 870mm x WIDTH: 730mm x DEPTH: 370mm

Without Gather - HEIGHT: 640mm x WIDTH: 730mm x DEPTH: 370mm

#### COMPACT POWER RATING:

High and low flame settings (gas only):

Heat input high: NG - 6.4KW

LPG input high: LPG - 4.9KW

Heat input low: NG - 3.8KW

LPG input low: LPG - 3.8KW

#### OTHER TECHNICAL INFORMATION:

1. Rosal Limestone is a soft material which contains fossils, of which the quantity is not controllable. It is very absorbent and is easily marked by liquids and soot which is a natural by-product of a living flame.
2. Fire available in NG or LPG.
3. ODS (Oxygen Depletion System), to monitor oxygen levels in the room (gas only).
4. For use with chimneys or flues (with or without mechanical extraction) - Class 1 x 1m length minimum or Class 2 x 2m length minimum (from above top of gather height).
5. Chimney/flue must be swept and tested prior to installation by a registered chimney sweep.
6. For air brick requirements please see air brick chart below in relation to high input settings.
7. Approximate running costs per hour on low (subject to your gas supplier tariff): NG - 10.05p, LPG 18.00p.
8. Remote Control as Standard. 240v, 3amp fused spur supply required for remote.

CVO reserve the right to amend and improve any of the specification sheets without prior notice.

All fires are living flames. Sooting can occur as a natural bi-product of a living flame and cannot be controlled or eliminated. Weathering and sooting of the enclosures is a natural and normal occurrence. This, understandably is more obvious on light coloured materials such as white stone and white powder coated steel.

Cast bronze and cast iron are hand sand cast and polished. Pitting and air holes are normal and a part of the unique quality of such a piece.



AIRBRICK CHART	
Input Energy:	
0-7KW	No Airbrick Required
8-9KW	11cm <sup>2</sup> free air
10-15	36cm <sup>2</sup> free air
16-18KW	50cm <sup>2</sup> free air
KEY	
NG	- NATURAL GAS
SF	- SOLID FUEL
LPG	- LIQUID PETROLEUM GAS
ALL DIMENSIONS WITHIN +/- 2mm	


Spirit Fires Ltd, 4 Beaumont Square Durham Way South Aycliffe Industrial Park  
 Newton Aycliffe County Durham DL5 6SW  
 Tel: +44 (0) 1325 327 221 Fax: +(0)1325 327 292  
 Email info@cvo.co.uk

**SPECIFICATION SHEET**  
**COMPACT RIBBON - (FIRE RIBBON™)**  
 Index # 21, Rev-13  
 Page 2 of 2


**NOTE - The dimensions on this product are for a metal enclosure**

For the builders opening please allow room for adjustments, gas and electric supply. **NOTE - The enclosure sits 20mm out from the wall.**  
 Allow 50mm gap around the sides and back of the unit.


**Top View**

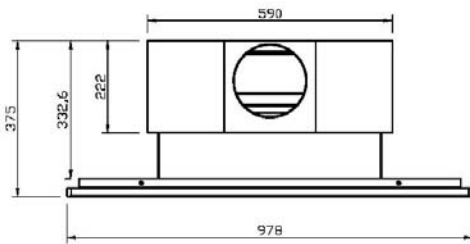


**Perspective View**

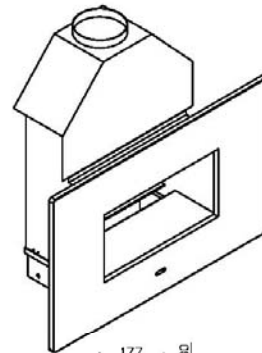

**Front View**

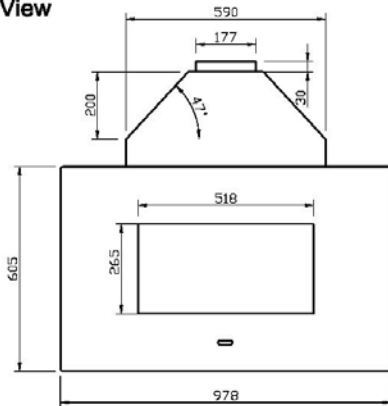

**Right Side View**

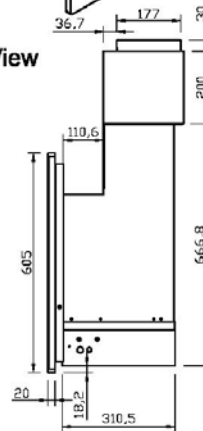

Gathers are optional depending upon installation requirements. If the standard gather is not to be used, the fire must be connected to the inglenook in accordance with CORGI and local regulations. The gather shown is for dimensional purposes only. The gather can be supplied as an optional extra. Please specify when placing your order.

CVO reserve the right to amend and improve any of the specification sheets without prior notice.

All fires are living flames. Sooting can occur as a natural bi-product of a living flame and cannot be controlled or eliminated. Weathering and sooting of the enclosures is a natural and normal occurrence. This, understandably is more obvious on light coloured materials such as white stone and white powder coated steel.

Cast bronze and cast iron are hand sand cast and polished. Pitting and air holes are normal and a part of the unique quality of such a piece.



AIRBRICK CHART	
Input Energy:	
0-7KW	No Airbrick Required
8-9KW	11cm <sup>2</sup> free air
10-15	36cm <sup>2</sup> free air
16-18KW	50cm <sup>2</sup> free air
KEY	
NG - NATURAL GAS	
SF - SOLID FUEL	
LPG - LIQUID PETROLEUM GAS	
ALL DIMENSIONS WITHIN +/- 2mm	

Spirit Fires Ltd, 4 Beaumont Square Durham Way South Aycliffe Industrial Park  
 Newton Aycliffe County Durham DL5 6SW  
 Tel: +44 (0) 1325 327 221 Fax: +(0)1325 327 292  
 Email info@cvo.co.uk