

FIRE VESSEL WITH LARGE SURROUND

Index # 22, Rev-13, Page 1 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

MATERIAL OPTIONS:

This fire is sold as a complete package with gas fire, remote control, enclosure, gather and fascia.

VESSEL MATERIAL: Hand Polished Cast Aluminium or Bronze

ENCLOSURE: Black Steel, Limestone, White Madre Perle or Black Granite.

FASCIA: Limestone, White Madre Perle or Black Granite.

CE APPROVAL:

Currently CE tested, approved for the following gas categories for supply into any member country.

Natural Gas I2H-G20-20mBar

LPG/Propane I3P(37)-G31-37mBar

DIMENSIONS:

Overall dimensions of surround: HEIGHT: 460mm x WIDTH: 1400mm x DEPTH: 40mm

Overall dimensions of fire: HEIGHT: 135mm x WIDTH: 360mm x DEPTH: 200mm

Dimensions of standard enclosure: HEIGHT: 330mm x WIDTH: 430mm x DEPTH: 360mm

Dimensions of required builder's opening: HEIGHT: 695mm x WIDTH: 480mm x DEPTH: 330mm

FIRE VESSEL POWER RATING:

High and low flame settings (gas only):

Heat input high: NG - 4.5KW LPG - 5.2KW

Heat input low: NG - 2.4KW LPG - 2.9KW

Approximate running costs per hour on high (subject to your gas supplier tariff): NG - 6p LPG - 27p

OTHER TECHNICAL INFORMATION:

1. Rosal Limestone is a soft material which contains fossils, of which the quantity is not controllable. It is very absorbent and is easily marked by liquids and soot which is a natural by-product of a living flame.
2. Fire available in NG or LPG, see approvals above.
3. ODS (Oxygen Depletion System) to monitor oxygen levels in the room (gas only).
4. For use with chimneys or flues (unaided by mechanical extraction) with an internal free area no less than 127cm² - Class 2 x 3m length. Chimney/flue must be swept and tested prior to installation by a registered chimney sweep.
5. For air brick requirements please see air brick chart below in relation to high input settings.
6. Supplied as Hard Wire Remote Only [No Handset and Magic Eye]
7. Power Required for Remote - 240v, 3amp fused spur supply.
8. Gathers are optional depending upon installation requirements. If the standard gather is not to be used, the fire must be connected to the inglenook in accordance with CORGI and local regulations. The gather shown is for dimensional purposes only. The gather can be supplied as an optional extra. Please specify when placing your order.
9. Metal Casting: The Vessel is made from Cast Metal which is sand cast at a UK Foundry and then Hand Polished for over 15 Hours at the CVO Fire Factory. Pitting and Air Holes are a normal occurrence and are a part of the unique quality of such a hand made piece. All Bowls are inspected and given a full quality control check at the factory. Once the Bowl is installed it will be seen that the overall beauty and uniqueness of your CVO Fire outweighs what is a very minor feature of casting.

=====
CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk


SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.

FIRE VESSEL WITH LARGE SURROUND

Index # 22, Rev-13, Page 2 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

NOTE - The dimensions on this product is for a stone enclosure. The builders opening is not affected on a metal enclosure.

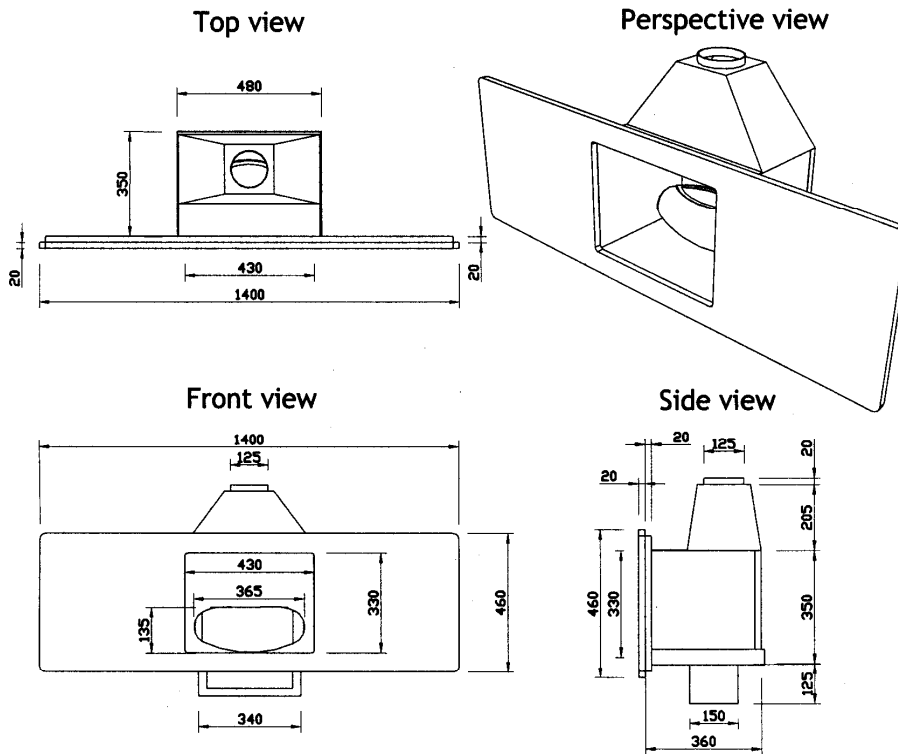

For the builders opening please allow room for adjustments, gas and electric supply. The enclosure sits 20mm out from the wall. Allow 50mm gap around the sides and the back of the unit.

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showrooms based in the North and South of the UK. Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.