

## SPECIFICATION SHEET

### Corona Suite with Angel Fire [Flueless]

Index # 64 - Rev-5 - 06/APRIL/2010

Page 1 of 2

#### MATERIAL OPTIONS:

- FIRE FASCIA:
  - Black Powder Coated Steel
  - Brushed Stainless Steel
- TRADITIONAL SURROUND OPTIONS:
  - Oak or Walnut - Others on request.
- HEARTH is supplied in Black Granite as standard

#### CE APPROVAL:

| Gas Category             | Natural Gas  |                 |                  |                 | LPG                    |                                |  |
|--------------------------|--|-----------------|------------------|-----------------|------------------------|--------------------------------|--|
|                          | I <sub>2H</sub>                                    | I <sub>2E</sub> | I <sub>2E+</sub> | I <sub>2L</sub> | I <sub>3P(37)</sub>    | I <sub>3B/P(30)</sub>          | I <sub>3+</sub>                        |
| Gas Type                 | G20  | G20             | G20/G25          | G25             | G31                    | G30/G31                        | G30/G31                                |
| Supply Pressure (mbar)   | 20   | 20              | 20/25            | 25              | 37                     | 30                             | 28-30/37                               |
| Countries of Destination | AT, CH, CZ, DK, ES, FI, GB, GR, IE, IT, NO, PT, SE | DE, LU          | BE, FR           | NL              | ES, GB, GR, IE, IT, PT | CH, CZ, DK, FI, GR, NL, NO, SE | BE, CH, CZ, ES, FR, GB, GR, IE, IT, PT |

#### INLET POWER, ROOM INTERNAL SPACE AND FREE AIR VENT

| Gas Type            | Fire Heat Input Version |        | "Minimum" Internal Room Space | Required Free Air Wall Vent | Approx Running Cost |
|---------------------|-------------------------|--------|-------------------------------|-----------------------------|---------------------|
|                     | HIGH                    | LOW    |                               |                             |                     |
| Natural Gas - 2.7kW | 2.7 kW                  | 2.0 kW | 27 m <sup>3</sup>             | 100 cm <sup>2</sup>         | 7p/Hour *           |
| Natural Gas - 3.5kW | 3.5 kW                  | 2.7 kW | 35 m <sup>3</sup>             | 125 cm <sup>2</sup>         | 9p/Hour *           |
| LPG/Propane - 3.5kW | 3.5 kW                  | 2.7 kW | 35 m <sup>3</sup>             | 125 cm <sup>2</sup>         | 21p/Hour **         |

\* Based on approximate figures as gas prices are variable.

\*\* Based on a 47Kg Bottle at £39.99/Bottle.

#### DIMENSIONS:

Overall dimensions of the surround: HEIGHT: 725mm x WIDTH: 840mm x DEPTH: 150mm (steel fascia).

Dimensions of fire opening: HEIGHT: 265mm x WIDTH: 450mm x DEPTH: 137mm

External dimensions of TRADITIONAL SURROUND: HEIGHT: 1107mm x WIDTH: 1365mm x DEPTH: 132mm

Dimensions of Black Granite Hearth: HEIGHT: 60mm x WIDTH: 1370mm x DEPTH: 380mm

#### OTHER TECHNICAL INFORMATION:

1. Complete Flueless Suite - Surround, Hearth and Fire.
2. For volume purchases different Fascia materials, colours and sizes will be considered
3. For Ventilation Requirements see above table.
4. The room in which the fire is to be installed requires a wall air vent as specified in the table above.
5. The room in which the fire is to be installed requires a window which can be opened.
6. The wall vent must be positioned at least 1m away from the appliance.
7. The fire must not be used in an internal space of "less" than as specified above, adjoining spaces not separated by a door may be included. Example calculation is 2.5m x 4m x 4.5m = 45m<sup>3</sup>. To convert from cubic feet (ft<sup>3</sup>) to cubic metre (m<sup>3</sup>), divide the room's volume in cubic feet by 35.3.
8. This fire has a manual control ignition system. A remote option is available upon request.
9. Remote version requires a 240V 3A fused spur. Remote Version is available with 3.5kW output only.
10. Oxygen Depletion System and Flame Failure safety devices are fitted as standard.

CVO reserve the right to amend and improve any of the specification sheets without prior notice.

All fires are living flames. Sooting can occur as a natural bi-product of a living flame and cannot be controlled or eliminated. Weathering and sooting of the enclosures is a natural and normal occurrence. This, understandably is more obvious on light coloured materials such as white stone and white powder coated steel.

Cast bronze and cast iron are hand sand cast and polished. Pitting and air holes are normal and a part of the unique quality of such a piece.



Spirit Fires Ltd, 4 Beaumont Square Durham Way South Aycliffe Industrial Park  
 Newton Aycliffe County Durham DL5 6SW  
 Tel: +44 (0) 1325 327 221 Fax: + (0)1325 327 292  
 Email info@cvo.co.uk

www.spiritfires.co.uk


Spirit Fires Incorporates the full CVO Fire range of Fires. For more details contact above or visit [www.cvo.co.uk](http://www.cvo.co.uk)

## SPECIFICATION SHEET

**Corona Suite with Angel Fire [Flueless]**

Index # 64 - Rev-5 - 06/APRIL/2010

Page 2 of 2

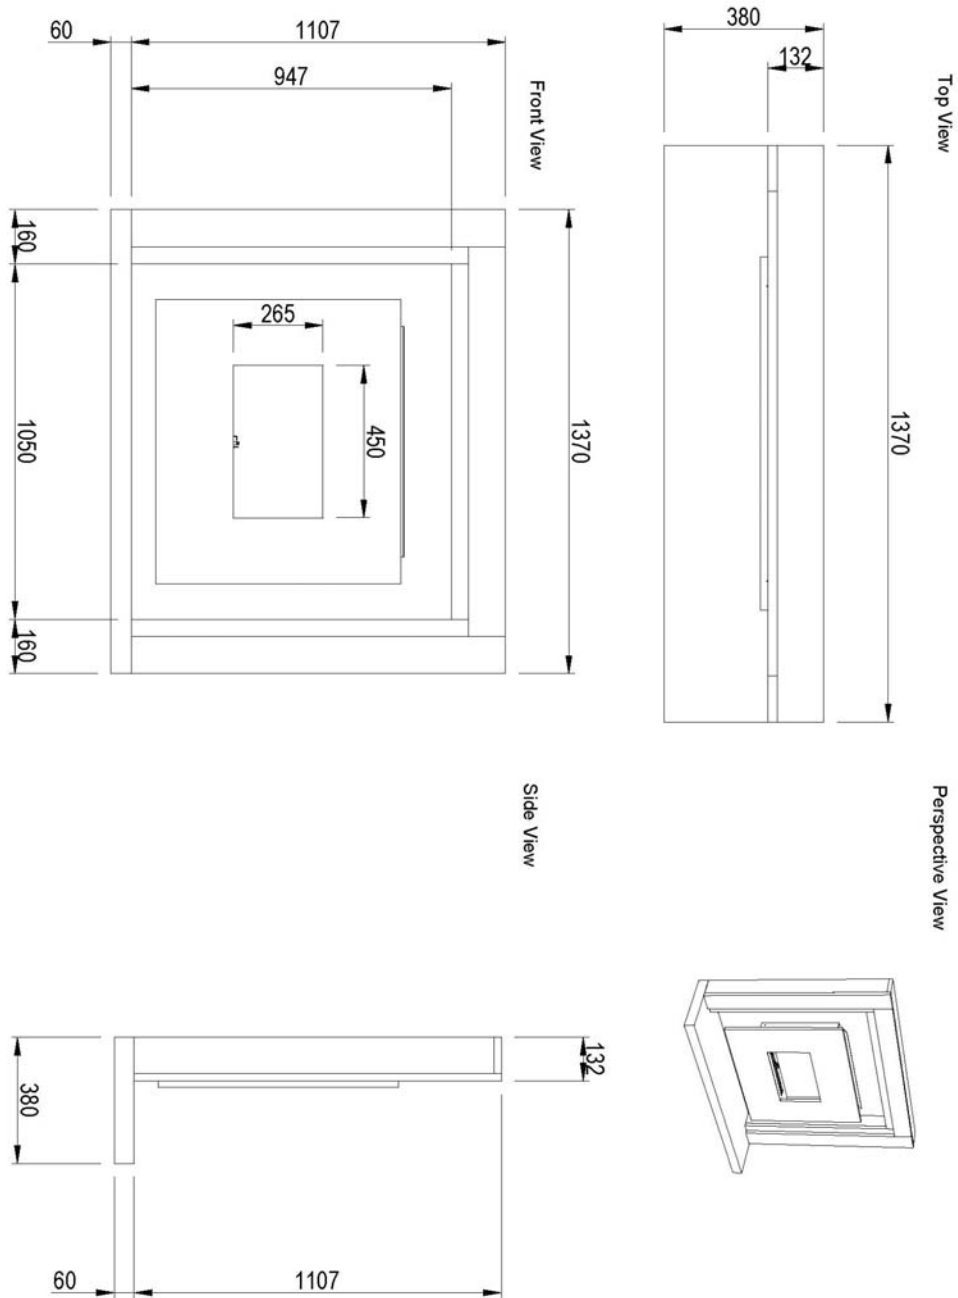

CVO reserve the right to amend and improve any of the specification sheets without prior notice.

All fires are living flames. Sooting can occur as a natural bi-product of a living flame and cannot be controlled or eliminated. Weathering and sooting of the enclosures is a natural and normal occurrence. This, understandably is more obvious on light coloured materials such as white stone and white powder coated steel.

Cast bronze and cast iron are hand sand cast and polished. Pitting and air holes are normal and a part of the unique quality of such a piece.



Spirit Fires Ltd, 4 Beaumont Square Durham Way South Aycliffe Industrial Park  
 Newton Aycliffe County Durham DL5 6SW  
 Tel: +44 (0) 1325 327 221 Fax: + (0)1325 327 292  
 Email info@cvo.co.uk

[www.spiritfires.co.uk](http://www.spiritfires.co.uk)

Spirit Fires Incorporates the full CVO Fire range of Fires. For more details contact above or visit [www.cvo.co.uk](http://www.cvo.co.uk)