

HE Inset Gas Fire – “Hole in the Wall” Version Index # 125 / Rev-2 / 30-Nov-2017 / Page 1 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

DESCRIPTION:

This version of our HE inset gas fires modified with a special trim to allow the fire to be mounted as a “Hole in the Wall” version without a surround or hearth. The trim is available as an upgrade. This version of the fire “cannot” be installed in a traditional fire surround, if in doubt call sales on 01325-301020.

BURNER:

Inset Gas Burner with either Ceramic Logs [BAILEY] or a clean flame [GLAMOUR].
Glass Fronted Gas Fire with Class 1 High Efficiency Rating for Natural Gas Only.

TRIM:

The trim is available in black or brushed steel.

CE APPROVAL:

The fires are CE approved for I2H-G20-20mBar (Natural Gas), available for all European Countries.

POWER RATING/EFFICIENCY:

GLAMOUR : Natural Gas: 2.0Kw [9p/hour], 77% Efficiency (BS7977:2013)
BAILEY : Natural Gas: 2.5Kw [11p/hour], 72% Efficiency (BS7977:2013)

DIMENSIONS:

See attached technical drawing on page 2.

OTHER TECHNICAL INFORMATION:

1. **SAFETY:** CE approved, 2013 standard, ODS (Oxygen Depletion System) fitted as standard.
2. **VENTILATION:** No additional room ventilation is required with this style of fire.
3. **HEAT OUTPUT:** This style of HE inset gas fire is designed to have a large and glamorous flame combined with a low fuel usage. As this is a high efficiency fire most of the heat generated is radiated into the room. By designing the fire with a lower power input it ensures that running costs are kept to a minimum while at the same time allowing the user to not become over powered by the heat generated. When compared to a standard inset gas fire our HE inset gas fires will give you 50% more heat for 60% of the cost. Saving Money.
4. **IGNITION:** The fire is operated by a Piezo manual ignition system.
5. **CONSTRUCTION OPENING:**
 - a. The inset fire will fit a standard fireplace opening of 430mm (w) x 570mm (h).
 - b. Review the technical drawing for dimensions.
 - c. The “minimum” depth required is 129mm.
 - d. The fire is supplied as a standard inset fire to fit any style of chimney - class 1, class 2, pre-cast, or using a flue liner.
 - e. The fire is designed to be installed within a fireplace opening or cavity which is built in line with current regulations from non-combustible materials.
6. **CHIMNEY:**
 - a. Suitable for all chimneys and flue systems with a “minimum” size of 125mm diameter x 3m length.
 - b. If using a flexible flue liner – we can supply a flue box if required.
 - c. The fire can be installed in a brick built chimney however a gap must be provided for debris. Brick chimneys will require sweeping and testing prior to installation. See install booklet.
7. **PIPE WORK:**
 - a. The fire has a gas usage of 0.30m³/hr via an 8mm inlet.
 - b. The pipe work must be able to maintain the inlet pressure at 20mBar when operated on full.
8. **GLASS:**
 - a. This is a glass fronted appliance and the glass becomes very hot during operation.
 - b. It is advised to mount the fire at a height away from small children.
 - c. It is advised that when operating the appliance in a room where children or elderly people will be present that a fireguard is used.

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.


Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showroom based in the North of the UK.
Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.

HE Inset Gas Fire – “Hole in the Wall” Version

Index # 125 / Rev-2 / 30-Nov-2017 / Page 2 of 2

CVO Fire : 01325-301020 : www.cvo.co.uk : sales@cvo.co.uk

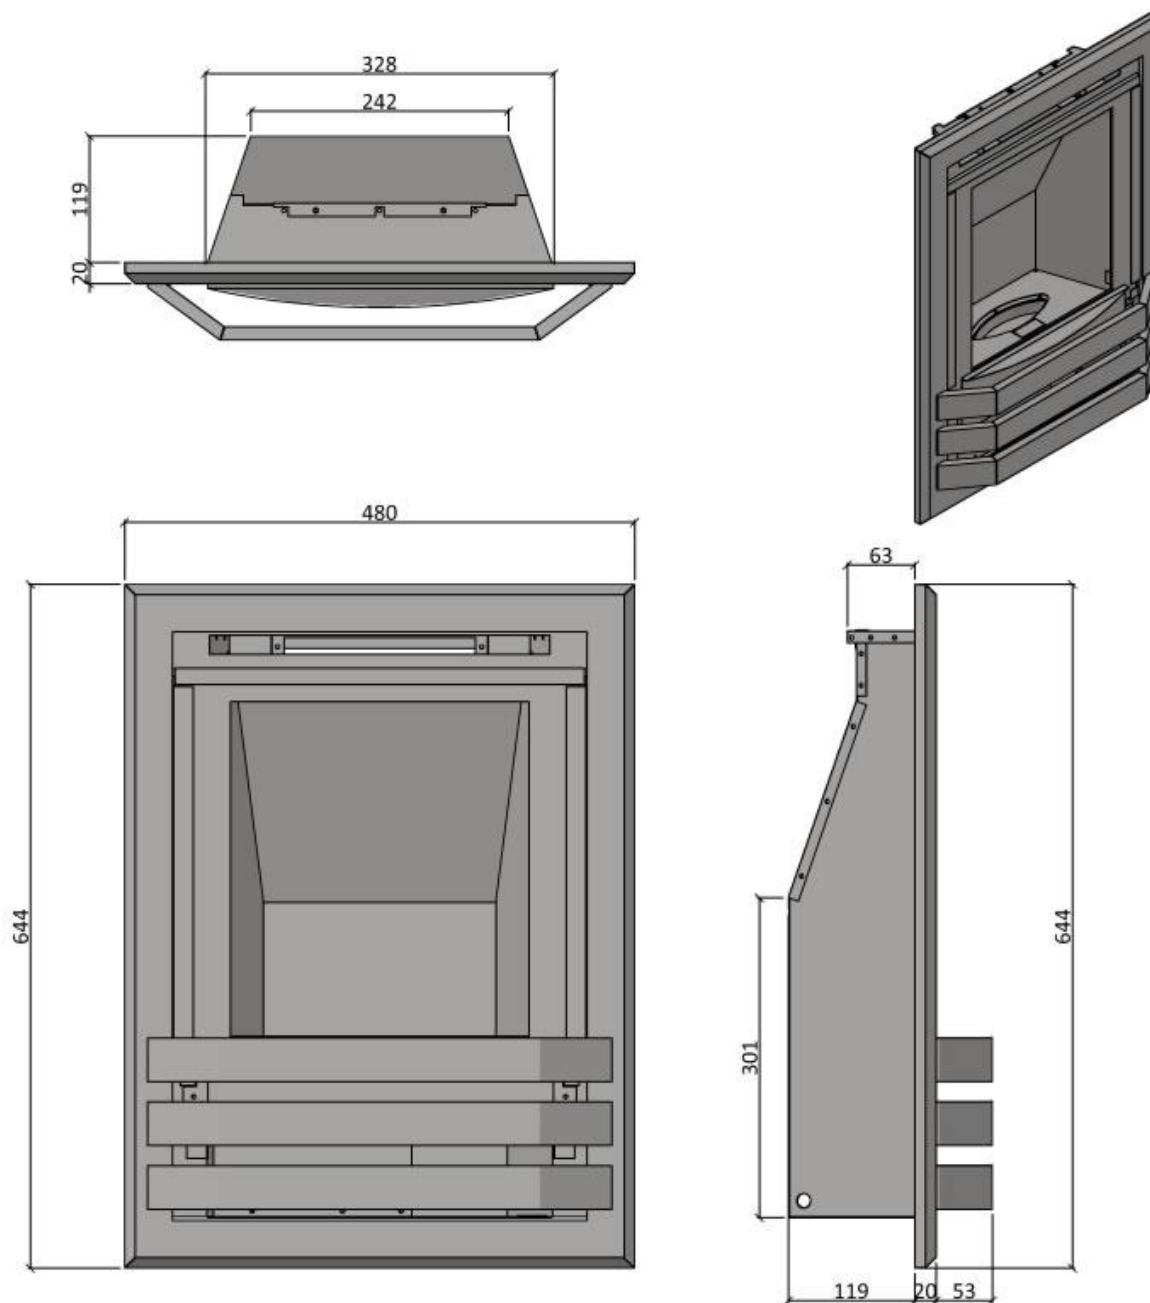

=====

CVO reserve the right to amend and improve the specification sheets without prior notice. If in doubt about any aspect of this specification please call. The specification is not to be used to install the fireplace. Every fire is supplied with an official install booklet. Spirit Fires Limited own the Spirit, CVO and Firevault Trademarks. Copying and distribution of these specifications is not permitted without the permission of Spirit Fires Ltd. All dimensions include a +/-2mm tolerance.

Spirit Fires Ltd, 4 Beaumont Square, Durham Way South, Newton Aycliffe, County Durham, DL5 6XN
Sales: +44 (0)1325-301020 Office: +44 (0) 1325 327 221 Fax: +(0)1325 327 292 Email: sales@cvo.co.uk Web: www.cvo.co.uk

SHOWROOM: CVO Fires can be seen live in our FIREVAULT showroom based in the North of the UK.
Visit www.firevault.co.uk or call 01325-301020 for full contact details, location maps and directions.